

TECHNICAL SPECIFICATIONS

[illegible]

*Measurement Tolerance on Power +/- 5%. All electrical parameters specified at STC : 25°C cell temperature; 100mW/cm² irradiance; AM 1.5


Other Characteristics

Type of Cell	: Mono / Multi Crystalline Silicon
Front Face	: Tempered Glass (Low Iron)
Encapsulate	: Ethylene Vinyl Acetate
Frame	: Anodized Aluminium
Junction Box	: Weather Proof Nylon 6
Temp. Coefficients	: Voltage -0.123 V / °K Current +4.4 mA / °K Power -0.47% / °K
NOCT	: 47+/-2 °C

- Certifications: IEC 61215 / IEC 61730 -I / IEC 61730 – 2 / TÜV Safety Class II
- The Standard range of modules is supplied without diodes. However, diodes can be provided on specific customer request at extra cost.
- All modules are supplied with screwless Hollow section frames.
- Warranty : Up to 25 Years Limited Extended Warranty
- Due to constant product modifications, WAAREE reserves the right to amend the above specifications without prior notice.

Mounting Details

All dimensions in mm and tolerances $\pm 2\text{mm}$

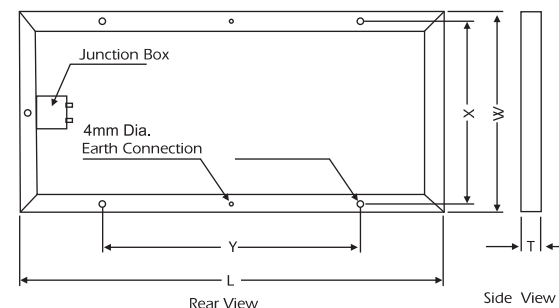

* Mounting Hole: upto 30Wp 6mm dia.
35Wp & 37Wp 12x8 mm

Sun Power Forever™