


TECHNICAL SPECIFICATIONS

Electrical Characteristics *		HS-175/WU-175	HS-180/WU-180	HS-190/WU-190	HS-200/WU-200
Power (Pm) in Watts (nominal)		175	180	190	200
Open Circuit Voltage (Voc) in Volts		32	32	32	32
Short Circuit Current (Isc) in Amps		7.29	7.50	7.92	8.33
Voltage at Maximum Power (Vmp) in Volts		26	26	26	26
Current at Maximum Power (Imp) in Amps		6.73	6.92	7.3	7.69
Maximum System Voltage		1000V / 600V			
Physical Parameters (Refer drawing below)					
Solar Cells per Module (Units)		54			
Length x Width x Thickness (L x W x T)	mm(Inches)	1490 x 990 x 42 (58.7 x 39.0 x 1.7)			
Mounting Holes Pitch (Y) - mm	mm(Inches)	900(35.4)			
Mounting Holes Pitch (X) - mm	mm(Inches)	949(37.4)			
Area - Sq. Meter / Area - Sq. ft.		1.475(15.9)			
Junction Box		IP 65 with Diodes			
Weight - Kg		17.5			
Container Packing Details		40 feet Container - 690 Modules			
		20 feet Container - 322 Modules			
Certifications: IEC 61215 / IEC 61730 -1 / IEC 61730 -2/ TÜV Safety Class II & ETL Mark for UL 1703 approval (USA & CANADA); CEC listed					

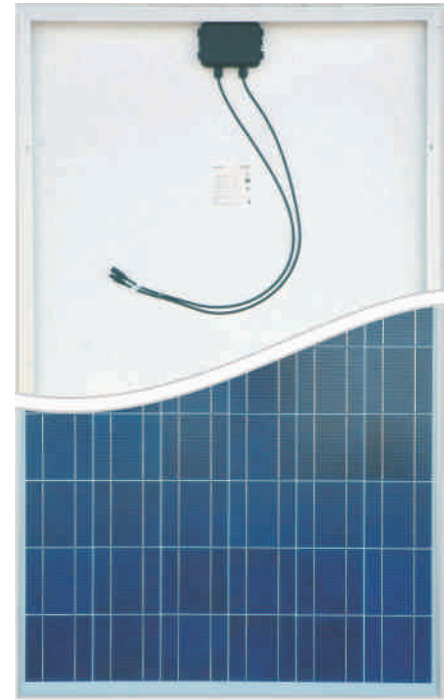


*Measurement Tolerance on Power +/- 3%. All electrical parameters specified at STC : 25°C cell temperature; 100mW/cm² irradiance; AM 1.5

Other Characteristics

Type of Cell	: Mono / Multi Crystalline Silicon
Front Face	: Tempered Glass (Low Iron)
Encapsulate	: Ethylene Vinyl Acetate
Frame	: Anodized Aluminium
Junction Box	: Weather Proof Nylon 6
Temp. Coefficients	: Voltage -0.123 V / °K Current +4.4 mA / °K Power -0.47% / °K
NOCT	: 47+/-2 °C

- All modules of 180Wp and above are supplied with pre-fixed cables and connectors.
- All modules are supplied with screwless Hollow section frames.
- Warranty : Up to 25 Years Limited Extended Warranty
- Due to constant product modifications, WAAREE reserves the right to amend the above specifications without prior notice.

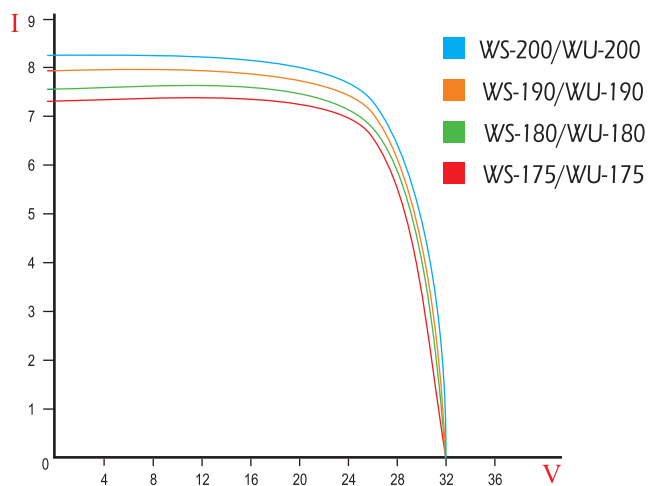

Mounting Details

All dimensions in mm and tolerances ±2mm

